

# Melt Pressure Transmitter Data Sheet Industrial Pressure Transmitter Model: CMPT124B-123T

#### Introduction

CMPT124B-123T Series Melt Pressure Transmitter (Flexible stem & High accuracy) comes with thermocouple, it can measure the pressure and temperature at one point. The series adopts special construction and excellent alloy elastic membrane to reduce the thermal draft and improve the accuracy. Zero & full span can be adjustable, amplified signal can be connected with PLC, which is the international standard. It is suitable for pressure measuring and controlling in melt fluid medium, such as the plastic & polymer in the process equipments.

### Application

- Chemical fiber & spinning Equipment
- Plastic and rubber, polyester process equipment
- Other pressure measurement and Control

#### **Features:**

- High-standard quality
- Stainless steel Seal
- Simple Installation
- Completely interchange similar import products


**RoHS** 

(F

- Internal 80% calibration
- Excellent stability



### Dimensions(mm):

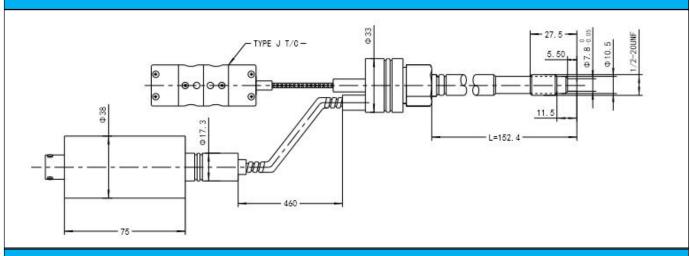

#### **Technical Characteristics**

Model	CMPT124B-123T
Range	010Mpa to 0150MPa (01500psi to 020000psi)
Output	0~5V; 0~10V; 4-20mA



Cheemi Technology Co., Ltd

*Tel: 025-85996365 E-mail: info@cheemi-tech.com www. cheemi-tech.com Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.* 



Accuracy		±0.5%FS						
Input voltage		24VDC (12~36)VDC						
Repeatability			±0.2%	V <sub>0</sub>				
Construction:			Wheatstone	e bridge				
Bridge resistance			350 ohms	±10%				
Overload pressure			1.5×FS	50				
Internal calibration			80%FSO	e±1%				
Insulation Resistancel		1(	000Megohm	s @50Vdc				
Max. Diaphragm Temp			0~350					
Electric connector	ic connector			PIN				
Process connector	1/2"-20UNF, M14×1.5, M18×1.5 (Customer design)			gn)				
0~350°C		J	,K,E,PT100	Optional				
Mounting hole								
-@0.02\\$)		D1	M22*1.5	M28*1.5	G3/4"	PT3/8"		
	-	D2	Ф16.1	Ф18.3	Ф18.3	Ф10.3		
	<u> </u>	D3	Ф20.1	Ф26.1	Ф24.2	Ф14.9		
	8 8	М	Ф23	Φ30	Ф21	Φ11		
		А	11	12	12	14		
C B		В	12	15	15	19		
Planar Sealed		С	40	35	35	40		
- @0. 02 (S)		D1	M12*1.5	M14*1.5	1/2-20 UNF	M18*1. 5		
ATTITITITI AND A	ş	D2	Φ8	Φ8	Φ8	Φ10.1		
a	8 8	D3	Ф10.8	Ф12.5	Ф11.5	Ф16.1		
		D4	Ф12.5	Ф14.5	Ф13.1	Φ20		
C B		А	6	6	6	6.5		
45° Slope Sealed		В	9	9.5	9.5	10		



Cheemi Technology Co., Ltd 2 Tel: 025-85996365 E-mail: info@cheemi-tech.com www. cheemi-tech.com Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.



#### Attention for installation

◆Installation Do not remove protective cap until ready to install. Prior to initial installation, verify correct machining of mounting hole. Install with aluminum gasket. The electronics housing should be secured, with the enclosed mounting bracket.

**♦ Remove** Make sure that there is no remained metal or plastic; remove all of the transducers from the equipment before you clean the extruder. You can remove the transducer only when the polymer is molten. And clean the diaphragm of the transducer with soft cloth as soon as you remove it. At the same

time, you can use ZHYQ's cleaning tool kit to clean the remained material in the mounting hole in order

to install easily next time.

◆Start-up Bring system to operating temperature, and with no pressure, follow recommended

procedures with instrumentation for zero and span adjustment. Make sure that there is sufficient "soak

time" to assure that any material at the tip of the transducer is molten before process is started.


•Electrical house The tip of the transducer can endure high temperature, but the shell (electrical

house) only endure temperature lower than 80°C, so it should place in the room temperature. It can

benefit for the accuracy and natural life of the transducer if you keep the shell from the high temperature.

Overload effect During the course of pressure measuring and controlling, it is better to make sure the transducer within the rated pressure, too long time overload the pressure will affect the accuracy and natural life of transducer, although the transducer own determinate overload ability.

•Wiring Use shielded cable, attach cable shield to ground at one end only. In order to prevent the jamming.

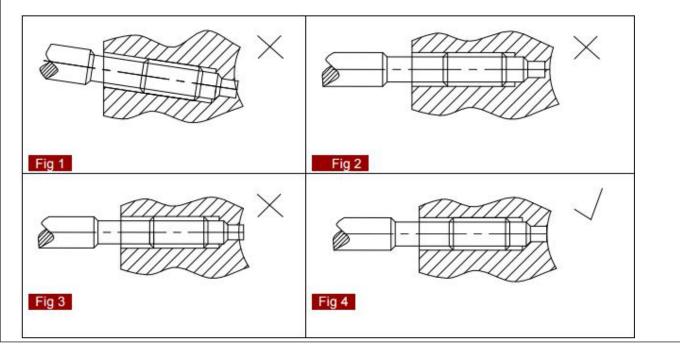




Cheemi Technology Co., Ltd Tel: 025-85996365 E-mail: info@cheemi-tech.com www. cheemi-tech.com Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.



### Wiring diagram


Output	Function	Color	5PIN
0/5V,1-5V;	Signal +	Blue	1
0/10V	Excitation +	Red	2
0/0.5V	Signal -	White	3
2.0mV/V	Excitation -	Yellow	4
	Calibration	Black	5
Output	Function	Color	5PIN
4/20mA	Signal+	Blue	1
	Excitation+	Red	2
	Calibration	Yellow	4
	Calibration Black	Black	5






Output	Function	Color	6PIN
0-5V;1-5V;	Signal +	Blue	Α
0-10V;	Signal -	Green	В
0/0.5V	Excitation +	Red	С
3.33mV/V	Excitation -	Yellow	D
1000 ( 100 P - 60 P	Calibration	Brown	E
ſ	Calibration	Black	F
Output	Function	Color	6PIN
4-20mA	E+/ S+	Red	A
	E-/ S-	Blue	В
-	Calibration	Yellow	E
	Calibration	Black	F

Output	Function	Color	8PIN	
0-5V;1-5V;	Excitation +	Red	Α	
0-10V;	Signal +	Blue	В	
0/0.5V	Excitation -	Yellow	С	
3.33mV/V	Signal -	Green /White	D	
	Calibration	Brown	E	
	Calibration	Black	F	
	Blank	121	G, H	
Output	Function	Color	8PIN	
4-20mA	E+/ S+	Red	Α	
	E+/ S+	Blue	В	
	Calibration	Yellow	E	
	Calibration	Black	F	



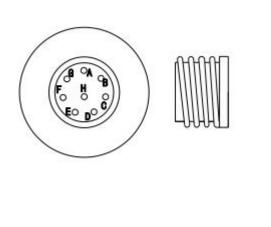



Cheemi Technology Co., Ltd Tel: 025-85996365 E-mail: info@cheemi-tech.com www. cheemi-tech.com Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.



Ordering Guide							
Model	Range (bar)	Output	Screw Thread	Electric connection	Accuracy	Diameter (mm)	Other requirement
CMPT124B-123T	*	*	*	*	*	*	
Example: CMPT124B-123T-500Bar-4/20mA-1/2-20UNF-6PIN-J							

